

KB2100 Network Control Keyboard

KB2100



Key Features

- 10.1" capacitive touch screen, 1280*800 resolution.
- 4D joystick control.
- Supports image displaying on the touch screen or projecting to an HDMI-connected display device.
- Supports simultaneous displaying of 8 video channels.
- Supports connecting Uniview IPCs and NVRs via network.
- Supports a maximum of 5,000 channels.
- Supports H.264 and H.265.
- Capable of decoding 1*4K, 4*1080P, or 8*720P videos.
- Supports PTZ control, including up/down/left/right movement, zoom/focus operations.
- Upgradeable via a USB drive.




Specifications

Function	Parameter
General	
Screen size	10.1 inches
Decoding format	H.264/H.265
Decoding capability	1*4K@25fps/4*1080@30fps/8*720P@30fps
Split screen	1/4/9 (supports simultaneous display of up to 8 channels)
Signal output	
HDMI output resolution	1920x1080@60Hz
Interface	
Serial interface	1 × RS-232 serial interface (DB9, reserved)
	1 × RS-485 serial interface (half-duplex, reserved)
HDMI output	1 × HDMI 1.3
Network interface	1 × 10M/100M adaptive Ethernet interface (RJ45)
Audio jack	1 × standard 3.5mm audio jack (reserved)
Power interface	DC 12V power interface
Hardware	
Power consumption	< 15W
Operating temperature	-10℃ to 40℃
Operating humidity	10% to 90% RH (non-condensing)
Storage temperature	-40℃ to 60℃
Dimensions (W × H × D) (mm)	449.7 × 115.4 × 178.6
Net weight	1.4 kg




Dimensions

KB2100

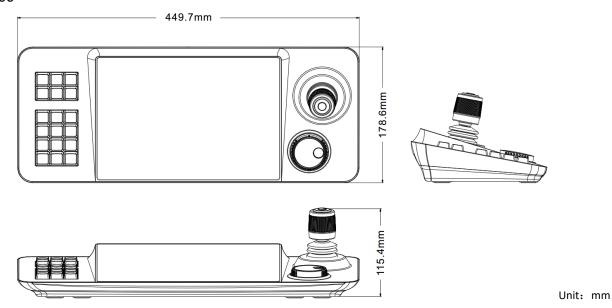

Rear Panel

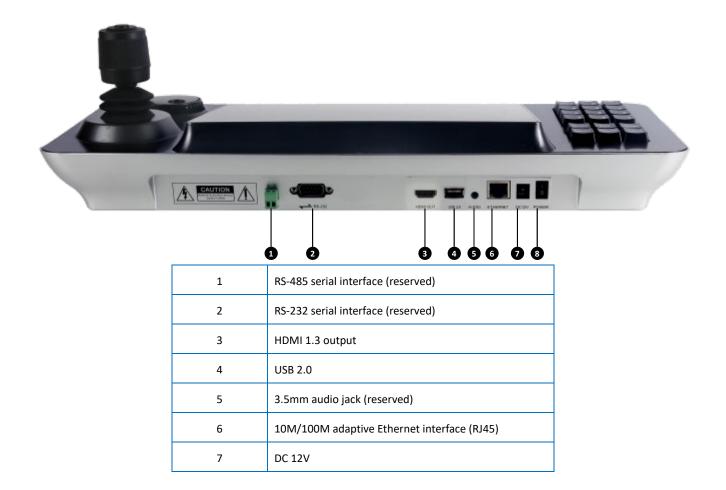



8 Power switch

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseas business@uniview.com; global support@uniview.com

http://www.uniview.com

 $\hbox{@2022 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.}$

* Product specifications and availability are subject to change without notice.